


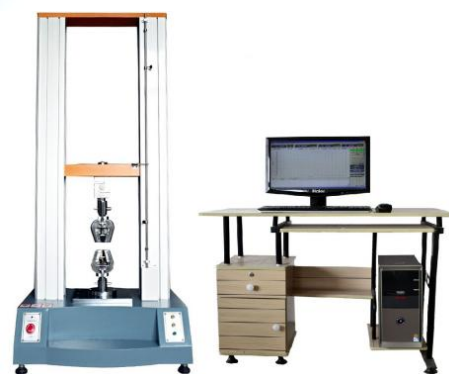

BOTO Group Ltd.

Add:Room 2304, Fortune Plaza, No.5616 Caoan , Anting Town, Jiading
District, Shanghai, China

Technical Regulations and Direction

1. Product Description

The servo computer universal material tensile testing machine is computer controlled and widely used in mechanical properties tests of non-metallic materials such as rubber, plastic, wire and cable, textiles, waterproof materials, non-woven fabrics, and metal wires, metal foils, metal sheets and metal bars. It is also suitable for various finished product tensile, compression, peeling, shearing, tearing, bending (folding) tests with special fixtures. It can print multiple data, and can make graphic output comparisons based on different data. It has high control accuracy and easy operation; it adopts modular design, and has a full range of accessories and flexible matching.

The servo computer universal material tensile testing machine is mainly suitable for testing the mechanical properties of metals such as tension, compression, and bending. It can also realize constant stress, constant strain, creep, relaxation, axial, radial and other dead cycle tests. It can automatically calculate parameters such as tensile strength, yield strength, elongation, constant elongation stress, constant stress elongation, elastic modulus, etc. according to GB, JIS, ASTM, DIN and other standards.

2. Equipment features

1. The servo computer universal material tensile testing machine can make curve categories: load-displacement, load-time, displacement-time, stress-strain, strain-time, stress-time.

2. The vertical and horizontal coordinates of the curve can be set arbitrarily.

3. Test data available;

1). Maximum force, minimum force, fracture value, upper and lower yield strength, tensile strength, compressive strength, elastic modulus, elongation, maximum, minimum, and average values of the peeling interval, etc. (Customers need to select before ordering) It has multiple protections such as overload, overcurrent, overvoltage, undervoltage, overspeed, and stroke;

2). This machine uses PC for data processing and analysis, and the test results can be automatically saved. After the test, the test curve can be called up again, and the test process can be reproduced by curve traversal, or curve comparison and curve amplification can be performed, and a complete test report and test curve can be printed in real time.

The data results are exported in the crystal report format currently used by the national standard.

3. Standards

GB/T16491-1996 Electronic universal testing machine;

GB/T 228.1-2010 Metallic materials - Tensile test - Part 1: Test method at room temperature;

GB/T 528-2009 Vulcanized rubber or thermoplastic rubber - Determination of tensile stress-strain

properties;

GB/T 1040-2006 Tensile properties test method;

GB/T 1041-2008 Plastics - Compression properties test method;

GB/T 9341-2008 Plastics bending properties test method;

ISO 527-1993 Determination of tensile properties of plastics;

GB/T 13022-91 Tensile test method for plastic films;

ISO 604-2002 Plastics - Determination of compression;


ISO 178-2004 Plastics bending test;

ASTM D 638-2008 Standard test methods for tensile properties of plastics;

Various tests specified by national or international standards such as GB, ISO, ASTM, BS, DIN, and JIS.

4. Technical Parameters

Capacity (1 sensor)	100KG~2000KG(2T)
Test effective width	400mm
Stretching stroke (without fixture)	1200mm
Device dimensions	700×500×1800mm
Device weight approx.	200Kg
Force measurement accuracy	Better than $\pm 0.5\%$
Deformation indication accuracy	Better than $\pm 0.5\%$
Load sensing	Anhui Aipik S-type force sensor
High resolution	1/250000
Magnification	24-bit AD stepless amplification
Unit selection	N, kg (including multiple measurement units including international units, users can also customize the required units)
Test speed range	0.01~300 mm/min (can be set arbitrarily)
Speed control accuracy	$\pm 0.2\%$ (0.5 level)
Overload setting protection function	When the set test force exceeds 10%, the system automatically shuts down for protection
Stroke setting protection function	Stroke upper and lower limit position setting protection,
Force transmission method	Taiwan TECO servo motor + servo drive controller + Taiwan TBI precision screw
Power consumption	700W; (configuration selected according to different capacities)
Special software	Reference to the software version of the computer measurement system
Test range	Can do tension, pressure, fatigue, bending, folding and shear tests
Power supply used	1 ϕ , 220V 50/60 Hz
Shutdown method	Upper and lower limit safety settings, emergency stop button, program force and elongation settings, specimen damage sensing

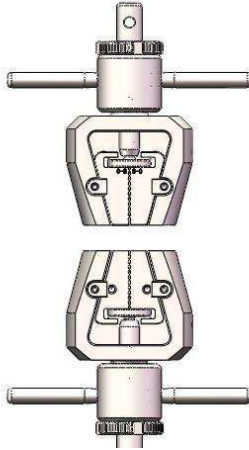Protection function	1. Limit protection: with program control and mechanical polarity protection to ensure the normal operation of the instrument within the set stroke;		
Tensile test fixture 1 set:			
Non-metal large deformation extensometer (purchased separately)	Large deformation extensometers are mainly used to accurately measure the deformation between the gauge lengths of large deformation materials such as rubber and plastic or metal materials when the deformation of the specimen is relatively large. 		
Metal small deformation extensometer (purchased separately)			

5. Machine accessories and configuration details

No.	Name	QTY	Note
1	Main frame of the testing machine	1 set	
2	Taiwan TECO servo motor	1 set	

3	Anhui APIC high-precision load sensor	2 pieces	
4	Deceleration system	1 set	
5	Taiwan TBI precision screw	1 set	
6	Professional testing software based on Windows 7 operating system	1 set	
7	Tensile test fixture	1 set	
8	Non-metal large deformation extensometer	/	Purchase separately
9	Metal small deformation extensometer	/	Purchase separately
10	Desktop industrial computer	1 unit	
11	Technical information (instruction manual, warranty card, certificate of conformity)	1 set	

1. Use the latest control board, better sampling rate

Main functional characteristics

The main controller uses the most advanced 32-bit ARM processor in the 21st century, and the processing speed reaches the level of Pentium-class general-purpose computers. Compared with the traditional 8-bit single-chip microcomputer measurement and control system, the overall performance is greatly improved, the calculation speed is faster, and the control accuracy is higher.

The core device of data acquisition uses the latest ultra-high-precision 24-bit AD in the United States, and the sampling rate can reach 2000 25-times/second, which can capture the instantaneous change process 26-of force, and the resolution is up to 500,000 divisions without any


27-division. And the original 6-point calibration technology is used to further improve the accuracy, and the force measurement accuracy is better than the national 0.5 level (highest level) standard.

The displacement encoder count adopts 4-fold frequency technology to increase the displacement resolution by 4 times, up to 0.0005mm.

Two output control modes, pulse and voltage, can control any servo motor, variable frequency motor or DC motor with pulse or voltage control interface to achieve smooth stepless speed regulation. In addition, there are switch signal outputs such as rise, fall and stop, which can be used to directly drive external relays or solenoid valves, and can be used to control DC motors or pneumatic, hydraulic and other power devices.

Advanced speed, displacement and force three closed-loop technology can achieve precise arbitrary waveform control.

Rich interface expansion capabilities: up to 4 24-bit analog inputs, 3 16-bit analog outputs, 3 pulse outputs, 3

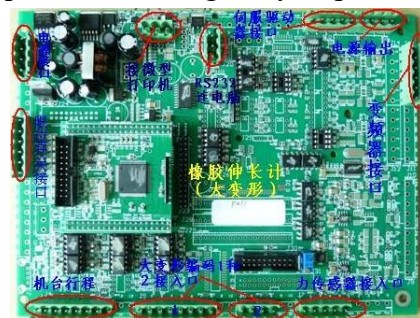

AB phase photoelectric encoder inputs, 9 switch inputs, 8 switch outputs, 1 USB interface, 1 RS232 interface, 1 RS485 interface, 4 LCD interfaces, 1 parallel micro-printer interface, 1 serial micro-printer interface, and 1 8×4 matrix keyboard interface.

All input and output interfaces use high-speed photoelectric isolation technology and have strong anti-interference capabilities!

2. Use Taiwan TBI ball screw for better transmission accuracy


High transmission efficiency The transmission efficiency of the ball screw pair is as high as 90% to 98%, which is 2 to 4 times that of the sliding screw pair, and can efficiently convert torque into thrust. The transmission is sensitive and stable, with low friction resistance, good sensitivity, no vibration at startup, no creeping at low speed, and can control micro-feed at μ level.

High positioning accuracy The temperature rise of the ball screw pair is small during transmission, and the axial clearance and primary elastic deformation can be pre-tightened to eliminate the axial clearance and primary elastic deformation.

The screw can be pre-stretched to compensate for thermal elongation, so higher positioning accuracy and repeat positioning accuracy can be obtained. Good accuracy retention, accurate raceway shape, minimal rolling friction and wear, with good accuracy retention, reliability and service life.

High transmission stiffness The inner and outer raceways of the ball screw pair are both eccentric angle double arc surfaces, and can be flexibly transmitted even when the raceway gap is extremely small.

Good synchronization performance Ball screw pair has the characteristics of high lead accuracy and good sensitivity



3. Adopt Taiwan TECO servo drive to better ensure accuracy

Accuracy: realize closed-loop control of position, speed and torque; overcome the problem of stepper motor out of step;

Speed: high-speed performance is good, generally the rated speed can reach 2000-3000 rpm;

Adaptability: strong anti-overload ability, can withstand loads three times the rated torque, especially suitable for occasions with instantaneous load fluctuations and requirements for rapid start-up;

Stability: stable operation at low speed, no stepping operation phenomenon similar to stepper motor will occur during low-speed operation. Suitable for occasions with high-speed response requirements;

Timeliness: the dynamic response time of motor acceleration and deceleration is short, generally within tens of milliseconds;

Comfort: heat and noise are significantly reduced.



4. Use professional processing technology to better ensure quality

Precise processing technology ensures the coordination of beams, bearings and screws, reduces the errors caused by processing, and further ensures accuracy



The body is sprayed with plastic, and the fixture is a regular heat treatment process, which is durable and has an orthodox appearance.


The transmission mechanism in the bottom box of the whole machine is synchronous belt drive. Compared with friction belt drive, there is no relative sliding between the pulley and the transmission belt of synchronous belt drive, which can ensure a strict transmission ratio. However, synchronous belt drive has high requirements for center distance and dimensional stability.

Synchronous belt drive has the advantages of belt drive, chain drive and gear drive. Since the belt and the pulley of synchronous belt drive transmit motion and power by meshing, there is no relative sliding between the belt and the pulley, which can ensure an accurate transmission ratio.

This measurement and control system is specially developed for tensile testing machines, presses, and electronic universal material testing machines.

It is suitable for measuring the mechanical properties and related physical parameters of various materials under tension, compression, bending, shearing, tearing, peeling, puncture and other states. It can be used for tension, compression, three-point bending, four-point bending, shearing, tearing, peeling, finished shoe puncture, carton pressure holding, foam cycle compression, spring tension and compression and various dynamic and static cycle tests.

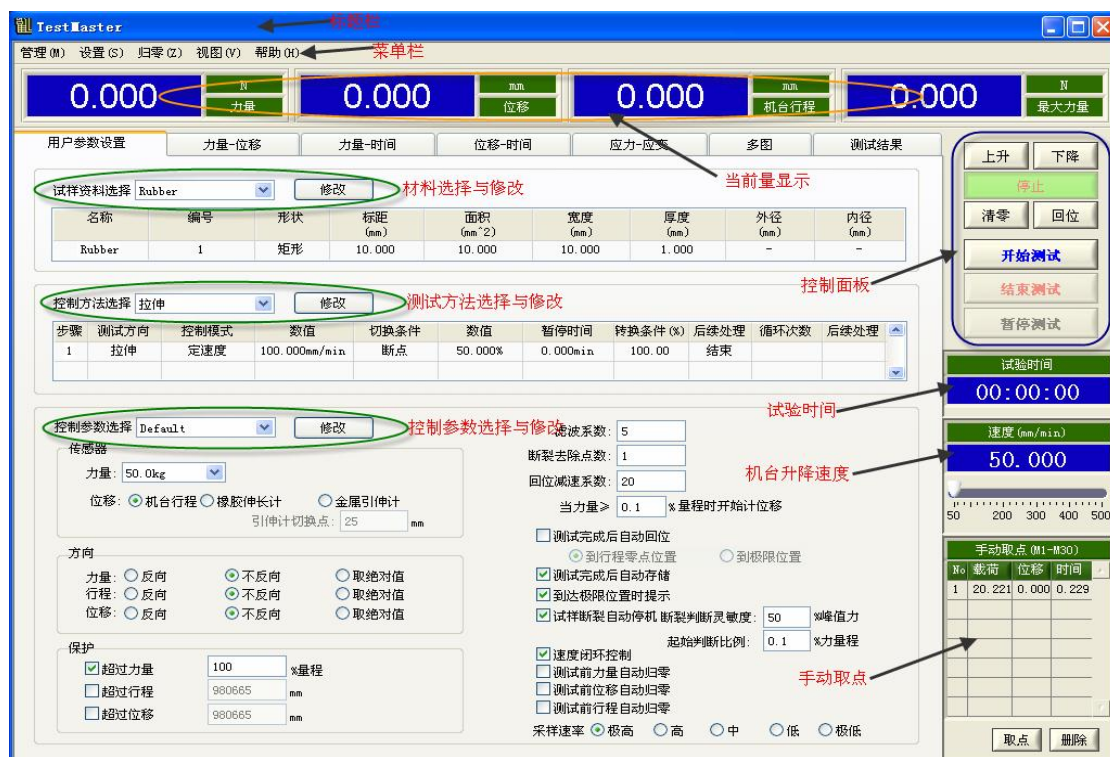

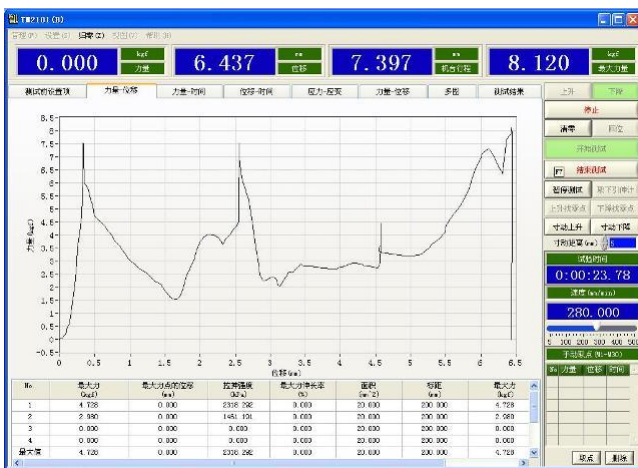

Force-displacement curve



Test result graph




Multiple curves



单位	精度	单位	精度
力量: kgf	3	力量速率: N/min	3
长度: mm	3	应力速率: MPa/s	3
时间: s	3	应变速率: %/min	3
应力: kPa	3	应变: %	3
力量/长度: N/mm	3	百分比: %	3
速度: mm/min	3	其他: %	3
面积: mm²	3		
能量: kgf·mm	3		
能量/面积: kgf/mm	3		

Unit Selection

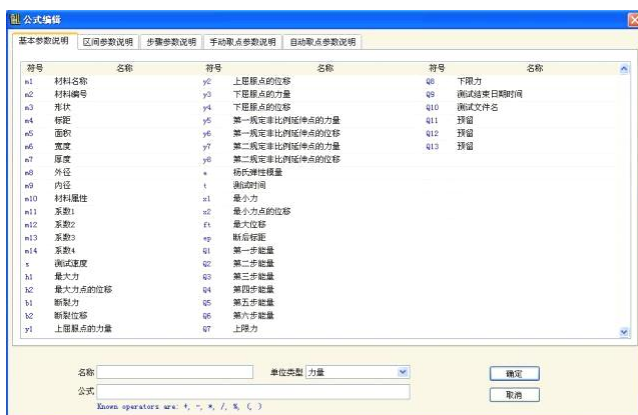

符号	名称	符号	名称	符号	名称
n1	材料名称	y0	屈服点的位移	Q0	屈服点的力
n2	材料编号	y1	屈服点的位移	Q1	屈服点的力
n3	材料	y2	屈服点的位移	Q2	屈服点的力
n4	屈服	y3	屈服点的位移	Q3	屈服点的力
n5	屈服	y4	屈服点的位移	Q4	屈服点的力
n6	屈服	y5	屈服点的位移	Q5	屈服点的力
n7	屈服	y6	屈服点的位移	Q6	屈服点的力
n8	屈服	y7	屈服点的位移	Q7	屈服点的力
n9	屈服	y8	屈服点的位移	Q8	屈服点的力
n10	屈服	y9	屈服点的位移	Q9	屈服点的力
n11	屈服	y10	屈服点的位移	Q10	屈服点的力
n12	屈服	y11	屈服点的位移	Q11	屈服点的力
n13	屈服	y12	屈服点的位移	Q12	屈服点的力
n14	屈服	y13	屈服点的位移	Q13	屈服点的力
n15	屈服	y14	屈服点的位移	Q14	屈服点的力
n16	屈服	y15	屈服点的位移	Q15	屈服点的力
n17	屈服	y16	屈服点的位移	Q16	屈服点的力
n18	屈服	y17	屈服点的位移	Q17	屈服点的力
n19	屈服	y18	屈服点的位移	Q18	屈服点的力
n20	屈服	y19	屈服点的位移	Q19	屈服点的力
n21	屈服	y20	屈服点的位移	Q20	屈服点的力
n22	屈服	y21	屈服点的位移	Q21	屈服点的力
n23	屈服	y22	屈服点的位移	Q22	屈服点的力
n24	屈服	y23	屈服点的位移	Q23	屈服点的力
n25	屈服	y24	屈服点的位移	Q24	屈服点的力
n26	屈服	y25	屈服点的位移	Q25	屈服点的力
n27	屈服	y26	屈服点的位移	Q26	屈服点的力
n28	屈服	y27	屈服点的位移	Q27	屈服点的力
n29	屈服	y28	屈服点的位移	Q28	屈服点的力
n30	屈服	y29	屈服点的位移	Q29	屈服点的力
n31	屈服	y30	屈服点的位移	Q30	屈服点的力
n32	屈服	y31	屈服点的位移	Q31	屈服点的力
n33	屈服	y32	屈服点的位移	Q32	屈服点的力
n34	屈服	y33	屈服点的位移	Q33	屈服点的力
n35	屈服	y34	屈服点的位移	Q34	屈服点的力
n36	屈服	y35	屈服点的位移	Q35	屈服点的力
n37	屈服	y36	屈服点的位移	Q36	屈服点的力
n38	屈服	y37	屈服点的位移	Q37	屈服点的力
n39	屈服	y38	屈服点的位移	Q38	屈服点的力
n40	屈服	y39	屈服点的位移	Q39	屈服点的力
n41	屈服	y40	屈服点的位移	Q40	屈服点的力
n42	屈服	y41	屈服点的位移	Q41	屈服点的力
n43	屈服	y42	屈服点的位移	Q42	屈服点的力
n44	屈服	y43	屈服点的位移	Q43	屈服点的力
n45	屈服	y44	屈服点的位移	Q44	屈服点的力
n46	屈服	y45	屈服点的位移	Q45	屈服点的力
n47	屈服	y46	屈服点的位移	Q46	屈服点的力
n48	屈服	y47	屈服点的位移	Q47	屈服点的力
n49	屈服	y48	屈服点的位移	Q48	屈服点的力
n50	屈服	y49	屈服点的位移	Q49	屈服点的力
n51	屈服	y50	屈服点的位移	Q50	屈服点的力
n52	屈服	y51	屈服点的位移	Q51	屈服点的力
n53	屈服	y52	屈服点的位移	Q52	屈服点的力
n54	屈服	y53	屈服点的位移	Q53	屈服点的力
n55	屈服	y54	屈服点的位移	Q54	屈服点的力
n56	屈服	y55	屈服点的位移	Q55	屈服点的力
n57	屈服	y56	屈服点的位移	Q56	屈服点的力
n58	屈服	y57	屈服点的位移	Q57	屈服点的力
n59	屈服	y58	屈服点的位移	Q58	屈服点的力
n60	屈服	y59	屈服点的位移	Q59	屈服点的力
n61	屈服	y60	屈服点的位移	Q60	屈服点的力
n62	屈服	y61	屈服点的位移	Q61	屈服点的力
n63	屈服	y62	屈服点的位移	Q62	屈服点的力
n64	屈服	y63	屈服点的位移	Q63	屈服点的力
n65	屈服	y64	屈服点的位移	Q64	屈服点的力
n66	屈服	y65	屈服点的位移	Q65	屈服点的力
n67	屈服	y66	屈服点的位移	Q66	屈服点的力
n68	屈服	y67	屈服点的位移	Q67	屈服点的力
n69	屈服	y68	屈服点的位移	Q68	屈服点的力
n70	屈服	y69	屈服点的位移	Q69	屈服点的力
n71	屈服	y70	屈服点的位移	Q70	屈服点的力
n72	屈服	y71	屈服点的位移	Q71	屈服点的力
n73	屈服	y72	屈服点的位移	Q72	屈服点的力
n74	屈服	y73	屈服点的位移	Q73	屈服点的力
n75	屈服	y74	屈服点的位移	Q74	屈服点的力
n76	屈服	y75	屈服点的位移	Q75	屈服点的力
n77	屈服	y76	屈服点的位移	Q76	屈服点的力
n78	屈服	y77	屈服点的位移	Q77	屈服点的力
n79	屈服	y78	屈服点的位移	Q78	屈服点的力
n80	屈服	y79	屈服点的位移	Q79	屈服点的力
n81	屈服	y80	屈服点的位移	Q80	屈服点的力
n82	屈服	y81	屈服点的位移	Q81	屈服点的力
n83	屈服	y82	屈服点的位移	Q82	屈服点的力
n84	屈服	y83	屈服点的位移	Q83	屈服点的力
n85	屈服	y84	屈服点的位移	Q84	屈服点的力
n86	屈服	y85	屈服点的位移	Q85	屈服点的力
n87	屈服	y86	屈服点的位移	Q86	屈服点的力
n88	屈服	y87	屈服点的位移	Q87	屈服点的力
n89	屈服	y88	屈服点的位移	Q88	屈服点的力
n90	屈服	y89	屈服点的位移	Q89	屈服点的力
n91	屈服	y90	屈服点的位移	Q90	屈服点的力
n92	屈服	y91	屈服点的位移	Q91	屈服点的力
n93	屈服	y92	屈服点的位移	Q92	屈服点的力
n94	屈服	y93	屈服点的位移	Q93	屈服点的力
n95	屈服	y94	屈服点的位移	Q94	屈服点的力
n96	屈服	y95	屈服点的位移	Q95	屈服点的力
n97	屈服	y96	屈服点的位移	Q96	屈服点的力
n98	屈服	y97	屈服点的位移	Q97	屈服点的力
n99	屈服	y98	屈服点的位移	Q98	屈服点的力
n100	屈服	y99	屈服点的位移	Q99	屈服点的力
n101	屈服	y100	屈服点的位移	Q100	屈服点的力
n102	屈服	y101	屈服点的位移	Q101	屈服点的力
n103	屈服	y102	屈服点的位移	Q102	屈服点的力
n104	屈服	y103	屈服点的位移	Q103	屈服点的力
n105	屈服	y104	屈服点的位移	Q104	屈服点的力
n106	屈服	y105	屈服点的位移	Q105	屈服点的力
n107	屈服	y106	屈服点的位移	Q106	屈服点的力
n108	屈服	y107	屈服点的位移	Q107	屈服点的力
n109	屈服	y108	屈服点的位移	Q108	屈服点的力
n110	屈服	y109	屈服点的位移	Q109	屈服点的力
n111	屈服	y110	屈服点的位移	Q110	屈服点的力
n112	屈服	y111	屈服点的位移	Q111	屈服点的力
n113	屈服	y112	屈服点的位移	Q112	屈服点的力
n114	屈服	y113	屈服点的位移	Q113	屈服点的力
n115	屈服	y114	屈服点的位移	Q114	屈服点的力
n116	屈服	y115	屈服点的位移	Q115	屈服点的力
n117	屈服	y116	屈服点的位移	Q116	屈服点的力
n118	屈服	y117	屈服点的位移	Q117	屈服点的力
n119	屈服	y118	屈服点的位移	Q118	屈服点的力
n120	屈服	y119	屈服点的位移	Q119	屈服点的力
n121	屈服	y120	屈服点的位移	Q120	屈服点的力
n122	屈服	y121	屈服点的位移	Q121	屈服点的力
n123	屈服	y122	屈服点的位移	Q122	屈服点的力
n124	屈服	y123	屈服点的位移	Q123	屈服点的力
n125	屈服	y124	屈服点的位移	Q124	屈服点的力
n126	屈服	y125	屈服点的位移	Q125	屈服点的力
n127	屈服	y126	屈服点的位移	Q126	屈服点的力
n128	屈服	y127	屈服点的位移	Q127	屈服点的力
n129	屈服	y128	屈服点的位移	Q128	屈服点的力
n130	屈服	y129	屈服点的位移	Q129	屈服点的力
n131	屈服	y130	屈服点的位移	Q130	屈服点的力
n132	屈服	y131	屈服点的位移	Q131	屈服点的力
n133	屈服	y132	屈服点的位移	Q132	屈服点的力
n134	屈服	y133	屈服点的位移	Q133	屈服点的力
n135	屈服	y134	屈服点的位移	Q134	屈服点的力
n136	屈服	y135	屈服点的位移	Q135	屈服点的力
n137	屈服	y136	屈服点的位移	Q136	屈服点的力
n138	屈服	y137	屈服点的位移	Q137	屈服点的力
n139	屈服	y138	屈服点的位移	Q138	屈服点的力
n140	屈服	y139	屈服点的位移	Q139	屈服点的力
n141	屈服	y140	屈服点的位移	Q140	屈服点的力
n142	屈服	y141	屈服点的位移	Q141	屈服点的力
n143	屈服	y142	屈服点的位移	Q142	屈服点的力
n144	屈服	y143	屈服点的位移	Q143	屈服点的力
n145	屈服	y144	屈服点的位移	Q144	屈服点的力
n146	屈服	y145	屈服点的位移	Q145	屈服点的力
n147	屈服	y146	屈服点的位移	Q146	屈服点的力
n148	屈服	y147	屈服点的位移	Q147	屈服点的力
n149	屈服	y148	屈服点的位移	Q148	屈服点的力
n150	屈服	y149	屈服点的位移	Q149	屈服点的力
n151	屈服	y150	屈服点的位移	Q150	屈服点的力
n152	屈服	y151	屈服点的位移	Q151	屈服点的力
n153	屈服	y152	屈服点的位移	Q152	屈服点的力
n154	屈服	y153	屈服点的位移	Q153	屈服点的力
n155	屈服	y154	屈服点的位移	Q154	屈服点的力
n156	屈服	y155	屈服点的位移	Q155	屈服点的力
n157	屈服	y156	屈服点的位移	Q156	屈服点的力
n158	屈服	y157	屈服点的位移	Q157	屈服点的力
n159	屈服	y158	屈服点的位移	Q158	屈服点的力
n160	屈服	y159	屈服点的位移	Q159	屈服点的力

6. Machine accessories and configuration details

1. Adopting Windows work platform, supporting Chinese and English language interface switching;
2. Supporting function navigation, users can enter the corresponding test function module according to the navigation interface;
3. Supporting various metal material mechanical property tests, such as metal tensile, compression, bending, shear and other tests;
4. Supporting various non-metal material mechanical property tests, such as cement compression and bending, concrete compression, rigid foam plastic compression, etc.;
5. Supporting extended test functions, users can add test items by themselves;
6. Independent open test project setting module, technical personnel can establish test projects, test operators can use test projects to conduct tests, which greatly reduces the business level requirements and operation difficulty of the majority of test operators;
7. Test control process Optimized design, users can view the test control steps at a glance, and the command types are rich;
8. The test data name can be modified and the test data display order can be adjusted to meet the user's special data output requirements;
9. Support custom additional test data items;
10. Support custom additional test standards and test data processing;
11. Support test data statistical calculation (mean, standard deviation, coefficient of variation);
12. Support curve analysis;
13. Support test traceability;
14. Support custom test reports, using Word or Excel spreadsheets, easy to operate, simple to set up, can be printed or previewed;
15. The software has various equipment safety and test safety protection;
16. Detailed software help documentation.

Factory real pictures display

1. Certificate



Some patents (nearly 100) and certificates



Some patents (nearly 100) and certificates



2. Shanghai Office :



3. Factory environment area



Work shop



Our team

4. Spot exhibition hall area \ finished product area



5. BOTO GROUP Factory located in Hunan Yueyang Industrial Park.

The industrial park is constructed by Shanghai Boyi Test Equipment Co., LTD with a total investment of RMB 400 million. Mainly engaged in the research and development and manufacturing of the whole chain of laboratory equipment; It is located next to yueyang section of Wuhan-Guangzhou high-speed railway, adjacent to Lotus Airport, and has very convenient transportation. The industrial park covers an area of 40 mu, consisting of a comprehensive office building and two standard factories, with a total construction area of nearly 20,000 square meters



Showroom 1



Showroom 2



6. On December 23, 2021, Li Aiwu, deputy Secretary of CPC Committee and Mayor of Yueyang city, Hunan Province, led the participants of Yueyang City industrial project construction mobile site meeting to inspect our company and observe the construction of industrial projects.



7. After the industrial park is fully put into operation, it can meet the annual output of new energy 3C semiconductor electronic circuit optical communication industry laboratory testing room environment simulation box 1200 sets; Another company has an independent sheet metal production and processing center, can independently undertake manufacturing business.



8. Standard size machine

225L High and Low Temperature Humidity
and Heat Alternating Test Chamber



225L

20 L constant temperature
and humidity test chamber

Overlapping Temperature and humidity chamber



B-TH-432



Thermalshock test chamber

Double layer constant temperature test chamber

Salt spray test chamber



150L Vertical high and low

temperature test chamber



Ventilation type aging test chamber



Leaning tower ultraviolet aging

test chamber

9 .Large non-standard real pictures display area



3.6 m3 constant temperature
laboratory



9 cubic meters low temperature room,
13 cubic meters high temperature room



Three comprehensive and humidity
test chamber



10.Shipment



Self-produced and sold



No dealer link



Save you 30%



**Quality and after-sales are
recognized by customers**

